



# RØDELink Performer Kit



## Polar pattern

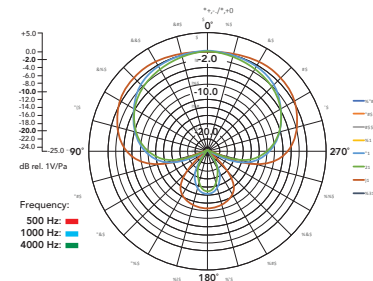

## Frequency response

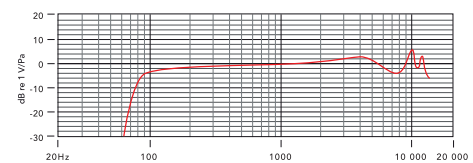

## Features

- Includes TX-M2 Microphone, RX-DESK Receiver, RØDE LB-1 Lithium-Ion Rechargeable Battery
- Series II 2.4GHz Digital Transmission
- 128-Bit Encrypted Signal
- High Quality Condenser Microphone
- Up to 100m range\*
- Power via LB-1 Rechargeable Battery (included)/AA Battery
- Low Handling Noise
- Mute Switch
- Designed and made in Australia

## General System Specs

Transmission type	2.4GHz fixed frequency agile system
System dynamic	118dB range
Range (distance)	Up to 100m*
Frequency range	35Hz – 20kHz
Max output	+18dBu level
Max input signal level	140dB SPL
Max latency	4ms

## Receiver (RX-DESK)

Power source	15v 1A DC Power Pack
Antenna	External diversity antenna
Output Connection	Balanced XLR/Unbalanced ¼" jack
Dimensions	208mmW x 37mmH x 166mmD
Weight	702gm

## Transmitter (TX-M2)

Power source	2 x AA 1.5v Batteries or RØDE LB-1 4.2v Lithium-Ion Rechargeable Battery or 5v USB
Antenna	Diversity antenna located at the bottom of TX-M2
Dimensions	40mmW x 256mmH x 40mmD
Weight	222gm

\* range estimations based on optimal environment